


产品介绍 Product Introduction

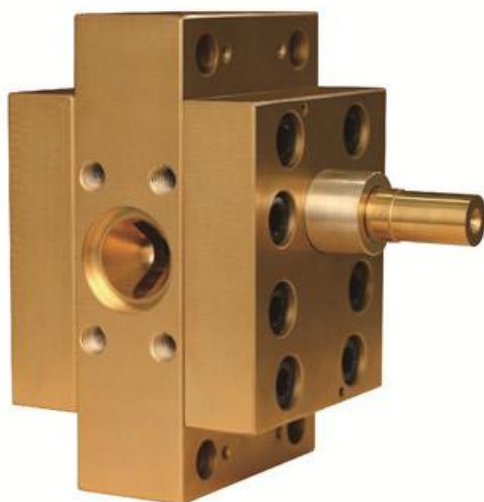

ZB-H系列高温高压熔体泵：

ZB-H系列高温高压熔体泵适用于工程塑料、吹膜等工艺中。

技术参数

泵体: CPM工具钢, 钛钽合金
齿轮: CPM工具钢, 钛钽合金,
特种材料及耐磨涂层
滑动轴承: CPM工具钢, 钛钽合金, 特种材料及耐磨涂层
轴封: 螺旋密封
加热系统: 电加热
规格/流量范围: 5CC - 2500CC

ZB-H Series High Temperature & High Pressure Melt Pump

ZB-H series high temperature & high pressure melt pump are applicable for engineering plastic or blown film technique.

Technical Parameter

Material for Melt Pump Body: CPM tool steel or Titanium Tantalum Alloy
Material for Gear: CPM Tool Steel, Titanium Tantalum Alloy, Special Materials or Abrasion Resistant Coating
Material for Sliding Bearing: CPM Tool Steel, Titanium Tantalum Alloy, Special Materials or Abrasion Resistant Coating
Shaft Sealing: Spiral Sealing
Heating System: Electrical Rod Heating
Model/Volume Range: 5CC -2500CC

操作参数

粘度: ≤ 20000 Pa.s
温度: $\leq 510^{\circ}\text{C}$ (950°F)
清洗温度: $\leq 590^{\circ}\text{C}$ (1100°F)
出口压力: $\leq 70\text{MPa}$
最高压差: 可达50MPa

Operating Parameter

Viscosity: ≤ 20000 Pa.s
Working Temperature: $\leq 510^{\circ}\text{C}$ (950°F)
Cleaning Temperature: $\leq 590^{\circ}\text{C}$ (1100°F)
Outlet Pressure: $\leq 70\text{Mpa}$
Differential Pressure: $\leq 50\text{Mpa}$